


# Bright LED

*LED Linear Trunking System*




## Track Spot Light

It is specially designed and perfectly used for pinpoint accent lighting ,the effects they create are enhanced by lighting, Special focus the light to attract the customer's attention to the objects on display. Optimized for efficient accent lighting in supermarket, museums, exhibition where merchandise billboard, paintings, sculptures and require accent lighting.




Track Spot light with pre-assembled connector make it easy to joint linear trunking rail electrically and mechanically. Track spot light has three separate switchable circuit—N and L1, N and L2, N and L3. The head of Track Spot light can be rotated horizontally 360°, and adjust vertically 90°.

0.6M track rail with track spot light

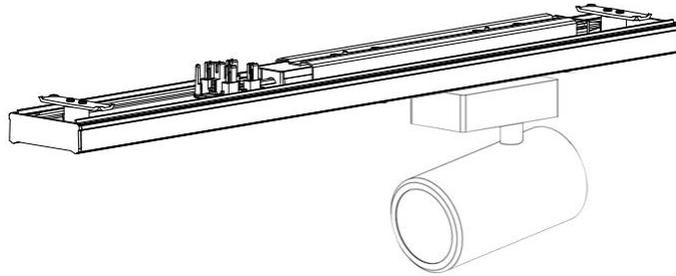

( 1 lamp for 0.6m track rail )

1.5M track rail with track spot light

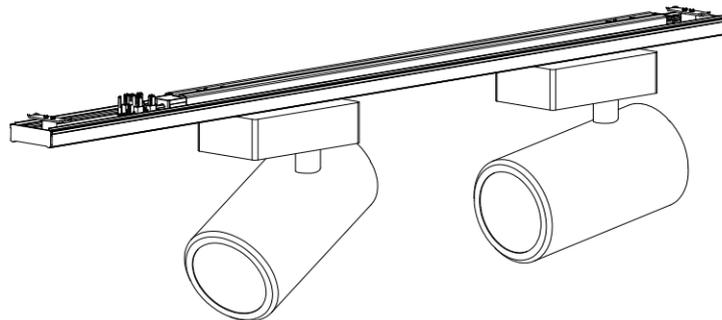


( 2~3 lamps for 1.5m track rail )


**Track spot light (4 wires / 3 circuits)**

3 separated switchable circuits

Adapter track box design ensures easy and intuitive fitting in the 3-phase track

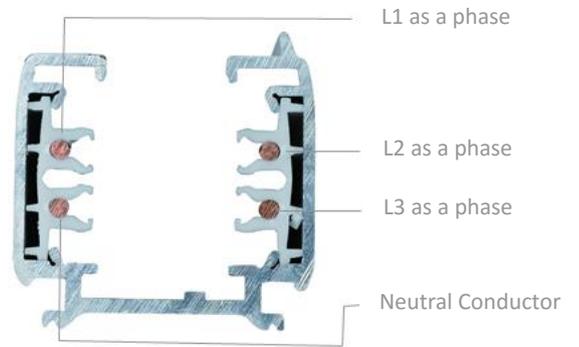

**Wiring and Installation**



1, **Phase selection:** 3-phase pre-selection (L1, L2, L3, when select L1, Track spot light on above photo need choose L1 correspond) via moving of contact pin prior to installation in trunking rail.



2, **Mounting** of Track Spot Light with pre-assembled connectors with integral plug-in system to trunking rail, the rotary toggle allows easy installation, quick-fixing to trunking rail.

**3.** Track spot light can be fixed by knob rail joint, built-in power connector for convenient electrical connection, adaptor for easy attach to 1, 2 or 3 circuit track.



More selection for, 5, 7 or 11 wires Track Spot Light with pre-assembled connector to match to trunking rail which was pre-assembled 5, 7 or 11-core through-wiring with 2.5mm<sup>2</sup> cable cross-section correspond.




Power: 31W  
 CRI: >80Ra / >90Ra  
 Luminous flux: 2650Lm  
 Light Source Philips LumiLEDs COB  
 Beam Angel: 14°/24°/34°  
 CCT: 2700K/ 3000K / 4000K / 5000K  
 Type: 5, 7 or 11 wire

Power: 45W  
 CRI: >80Ra / >90Ra  
 Luminous flux: 3850Lm  
 Light Source Philips LumiLEDs COB  
 Beam Angel: 14°/24°/34°  
 CCT: 2700K/ 3000K / 4000K / 5000K  
 Type: 5, 7 or 11 wire


System size: (1x SET) = 570mm / 1416mm

Horizontally rotatable 360°, vertically rotatable 90°

Track Spot light sharp angle



Typical application

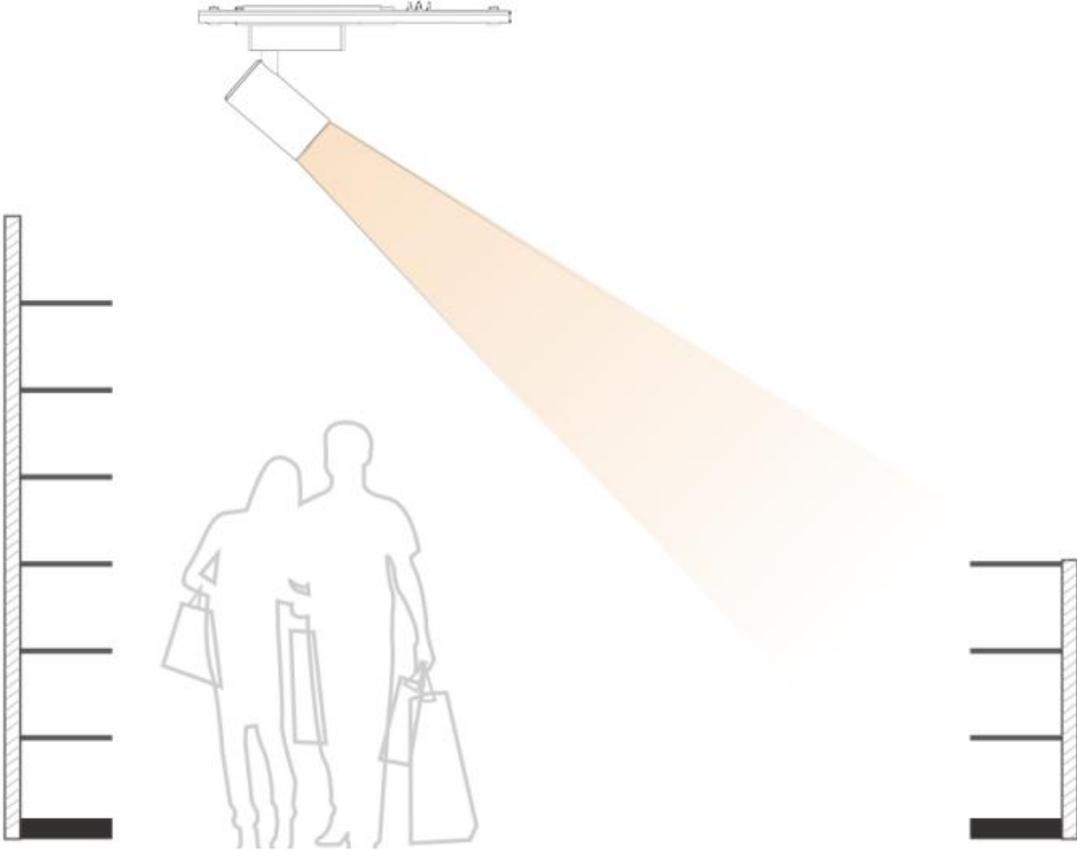

300lx on the shelf surface

Sharp angle lighting solution is specially designed, really comes into its own in presentation application, its beam light distribution focuses optimized illuminance on the merchandise, this way, customer’s attention will be directed to the products which are on display.

# BrightLED

BrightLED West  
Admiraalsweg 6  
2315 SC Leiden, telefoon; +31-71-5892462

BrightLED East  
Lenteweg 100  
7532 RL Enschede, telefoon; +31-85-4019351